

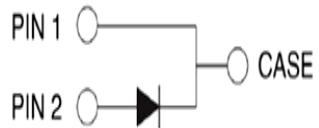
Product Features

- Silicon Carbide Unipolar Device
- Zero Reverse Recovery Current
- Zero Forward Recovery Voltage
- Positive Temperature Coefficient on VF
- Reduction of Heat Sink Size
- Parallel Devices Without Thermal Runaway

Applications

- Switch Mode Power Supplies
- Uninterruptible Power Supplies
- Motor Control
- PV Inverters
- Wind Power Station

Part Number	Package	Marking
20A-1200V B4	TO-247-2L	T.B.D


Absolute Maximum Ratings (Tc=25°C)

Parameter	Symbol	Value	Units
Repetitive Peak Reverse Voltage	V _{RRM}	1200	V
Surge Peak Reverse Voltage	V _{RSM}	1200	V
Continuous Forward Current	I _F	26 *	A
		20**	A
Non-Repetitive Peak Surge Forward Current@8.3mS half sine wave	I _{FSM}	180	A
Power Dissipation	P _D	250	W
Operating Junction Temperature and Storage Temperature Range	T _j 、 T _{STG}	-55~175	°C

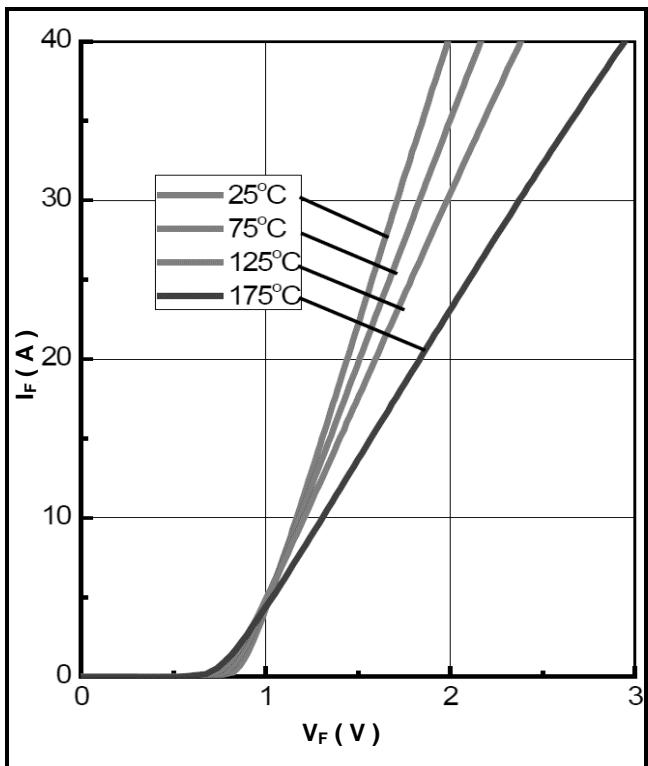
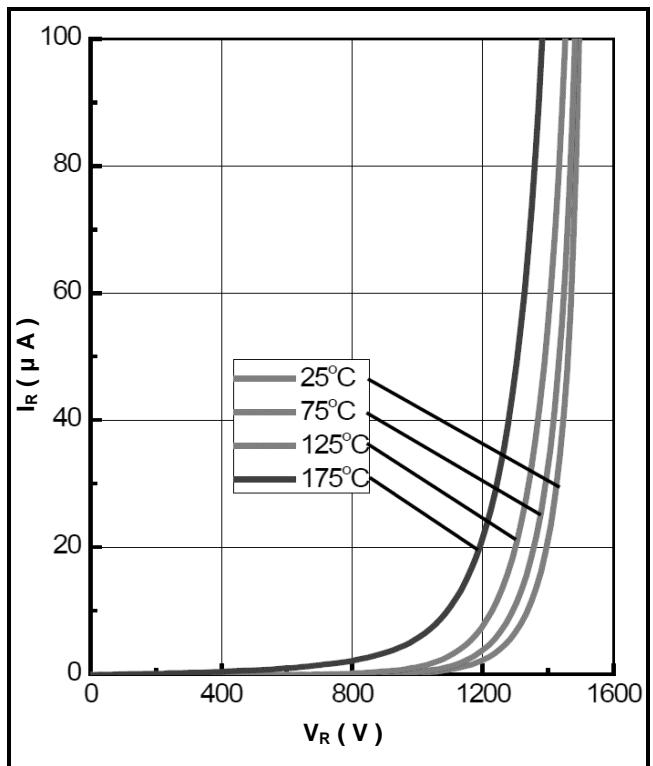
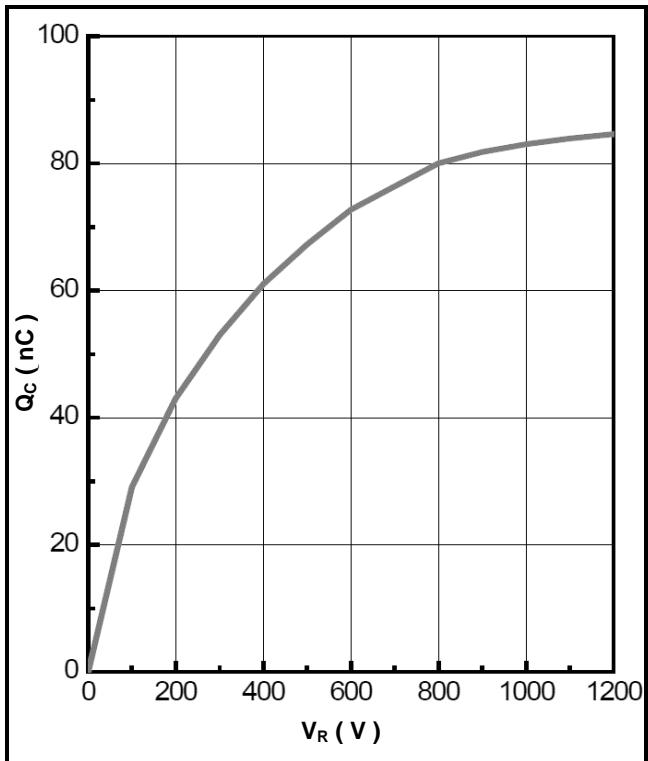
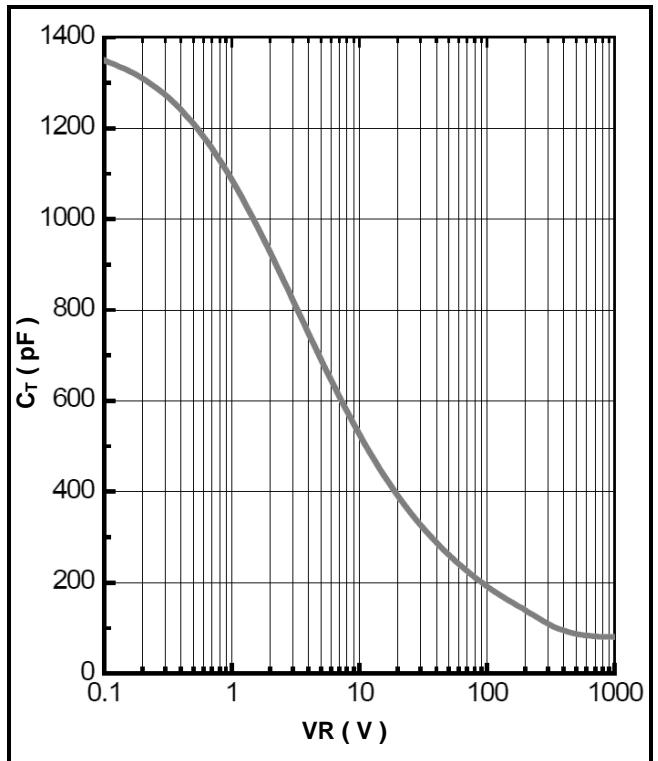
Remake: * — Tc≤135°C , ** — Tc≤154°C

Electrical Characteristics $T_J=25^\circ\text{C}$

Parameter	Symbol	Test Conditions	Min	Type	Max	Units
Reverse Breakdown Voltage	V_{BR}	$I_R=1\text{mA}$	1200			V
Forward Voltage	V_F	$I_F=20\text{A},$		1.45	1.8	V
		$I_F=20\text{A}, T_J = 175^\circ\text{C}$		2.0	2.5	V
Reverse Leakage Current	I_R	$V_R=1200\text{V}$		10	100	μA
		$V_R=1200\text{V}, T_J = 175^\circ\text{C}$		50	500	μA
Total Capacitance	C_T	$V_R=0.1\text{V}, f=1\text{MHz}$		1350		pF
		$V_R=400\text{V}, f=1\text{MHz}$		90		pF
		$V_R=800\text{V}, f=1\text{MHz}$		80		pF
Total Capacitive Charge	Q_C	$V_R=800\text{V}, I_F=20\text{A},$ $di/dt=200\text{A}/\mu\text{s}$		80		nC

Thermal Characteristics

Package	Parameter	Symbol	Type	Units
TO-247-2L	Thermal Resistance from Junction to Case	R_{thJC}	0.6	$^\circ\text{C/W}$
	Thermal Resistance from Junction to Ambient	R_{thJA}	80	$^\circ\text{C/W}$
	Soldering temperature	T_{sold}	260	°C

Typical Performance

Figure 1. Forward Characteristics

Figure 2. Reverse Characteristics

Figure 3. Total Capacitive Charge vs. Reverse Voltage

Figure 4. Total Capacitance vs. Reverse Voltage

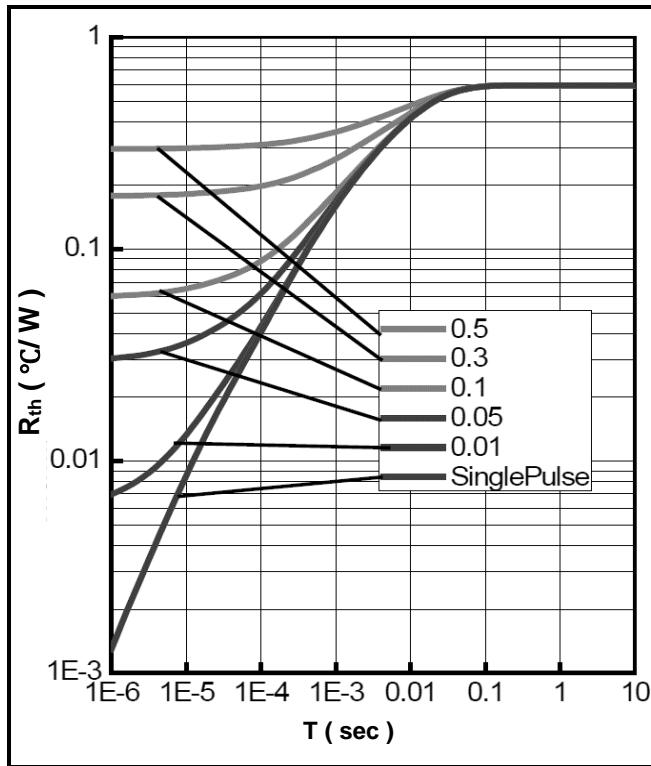


Figure 5. Transient Thermal Impedance

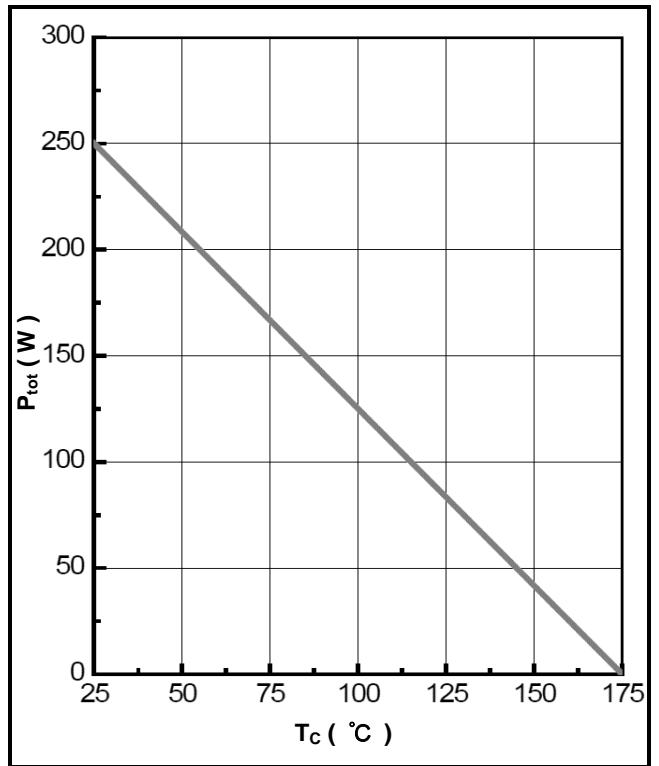


Figure 6. Power Derating

Package TO-247-2L

Symbol	Min.(mm)	Typ.(mm)	Max.(mm)
A	14.1	15.8	17.4
B	18.4	20.5	22.6
C	4.50	5.00	5.50
D	3.15	3.5	3.85
E	1.08	1.20	1.32
F	18.2	20.3	22.4
G	4.20	4.69	5.20

